


IRT/C.01

Product Overview

The IRT/c.01 features:

- Infrared Thermocouple IRT/c
- Non-contact
- Self-powered
- Intrinsically Safe
- Repeatability 0,01°C (0.02°F)
- Interchangeability ±1%
- Resolution approx. 0,0001°C (0.0002°F)
- Small Size

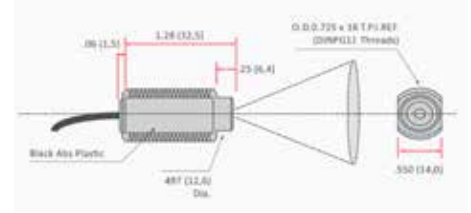

Technical Data


Sensing Range	-45 to 290°C (-50 to 550°F)
Ambient Temperature Range	-18 to 70°C (0 to 160°F)
Optimum Range Selections	Eight models per t/c type (see Temperature Selection Chart)
Field of View	approximately 60° (1:1)
Minimum Spot Size	8 mm (.3")
Spectral Response	6,5 to 14µm
Output Impedance	3 Kohms approx

Response Time	100 Milliseconds
Dimensions	32.5 x 20 mm Dia. (1.28" x .71")
Housing	High strength ABS, hermetically sealed, exceeds NEMA 4,4X; IP65, 67, intrinsically safe. Two locknuts supplied
Cable	Thermocouple extension grade, PVC jacket, unshielded, 0,9 m (3")
Weight	40g (1.4oz.) with cable

Calibration

Ordering information IRT/c.01-* (Thermocouple Type) - (Pre-calibrated Temperature Range). Thermocouple type J,K,E,T over temperature range specified.

Temperature Selection Chart

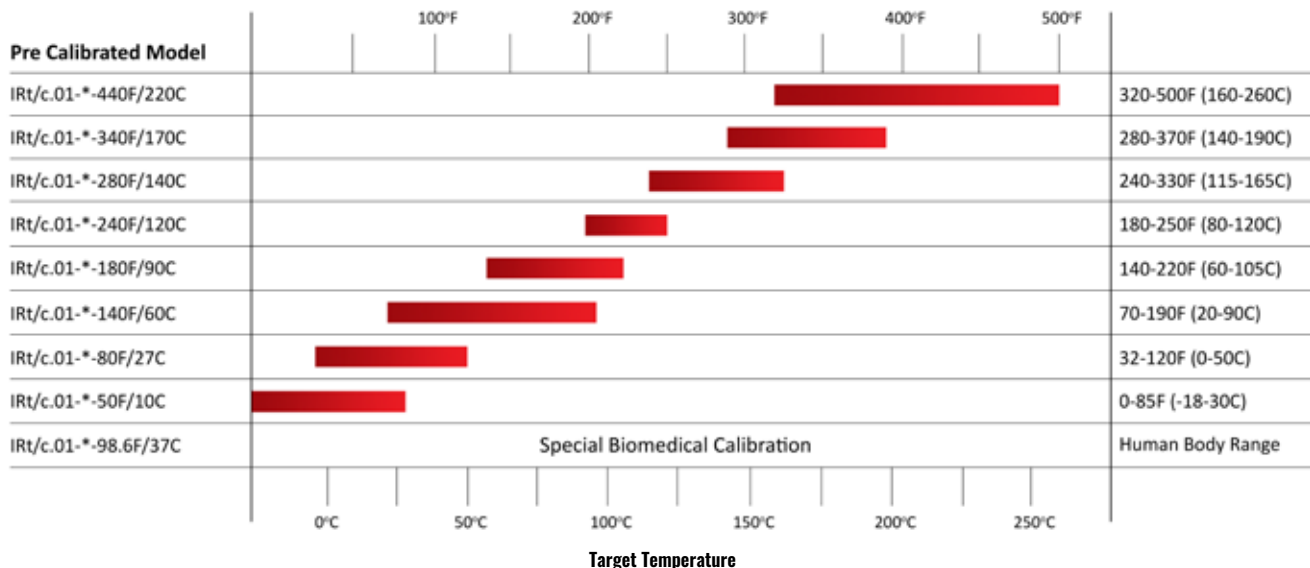

Exergen Corporation Office:

USA
400 Pleasant Street
Watertown, MA 02472
Tel: +1 617 923 9900 press 4 for industrial
Fax: +1 617 923 9911

Exergen Industrial International/OEM Sales Office:

Clever IR
The Netherlands
Pastoor Clercxstraat 26
5465 RH Veghel
+31 (0)413 376 599

industrial@exergen.com
www.exergen.com