


### Product Overview

The IRT/c.10 features:

- Infrared Thermocouple IRT/c
- Non-contact
- Self-powered
- Intrinsically Safe
- Repeatability 0,01°C (0.02°F)
- Interchangeability ±1%
- Resolution approx. 0,0001°C (0.0002°F)
- Small Size

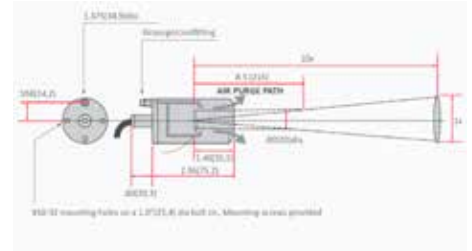

### Technical Data


<b>Sensing Range</b>	-45 to 650°C (-50 to 1200°F)
<b>Ambient Temperature Range</b>	-18 to 200°C (0 to 400°F)
<b>Optimum Range Selections</b>	Eight models per t/c type (see Temperature Selection Chart)
<b>Field of View</b>	approximately 6° (10:1)
<b>Minimum Spot Size</b>	20 mm (.8")
<b>Spectral Response</b>	6,5 to 14,μm
<b>Output Impedance</b>	4 to 8 Kohms approx
<b>Response Time</b>	100 Milliseconds

<b>Dimensions</b>	86 x 35 mm Dia. (3.4" x 1.375")
<b>Housing</b>	Stainless steel, hermetically sealed, exceeds NEMA 4,4X; IP65, 67, cable shield grounded to housing and electrically isolated from signal
<b>Cable</b>	Twisted shielded pair of base thermocouple material (J,K,E,T), 0,9 m (3 ft) std length, Teflon sheathed, rated to 200°C (392°F) continuous service
<b>Air Purge</b>	Built-in; designed for severe paint or ink environment; 0,9 m (3') of tubing provided
<b>Weight</b>	184g (6.5oz.) with cable

### Calibration

Ordering information IRT/c.10-K- (Pre-calibrated Temperature Range).

Temperature Selection Chart

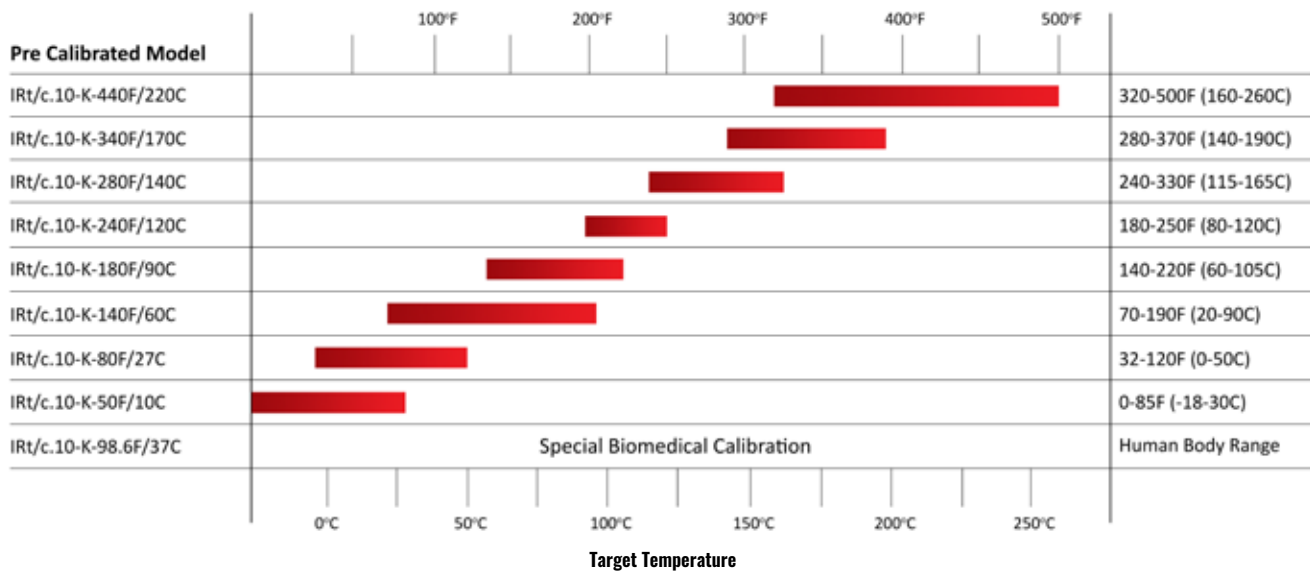

Exergen Corporation Office:

USA  
400 Pleasant Street  
Watertown, MA 02472  
Tel: +1 617 923 9900 press 4 for industrial  
Fax: +1 617 923 9911

Exergen Industrial International/OEM Sales Office:

Clever IR  
The Netherlands  
Pastoor Clercxstraat 26  
5465 RH Veghel  
+31 (0)413 376 599

industrial@exergen.com  
www.exergen.com