


## IRt/c TESTED AT 5000 PSIG (340 BAR) PRESSURE

For some types of processes, it is necessary to monitor temperatures of materials subjected to high gas pressures. Conventional contact devices are difficult to employ under these conditions and conventional IR devices are unsuitable because their optical and electronic components are unable to withstand high pressures.

With its elegant simplicity and solid construction, the IRt/c provides a solution. It has been tested at pressures up to 5000 psig (340 bar). A simple ferrule type tubing fitting may be used to provide a pressure-tight seal around the IRt/c housing. If using an IRt/c model with a lensed optical system (IRt/c.5; IRt/c.10; etc.), pierce the lens at its edge with a needle to provide pressure equalization.

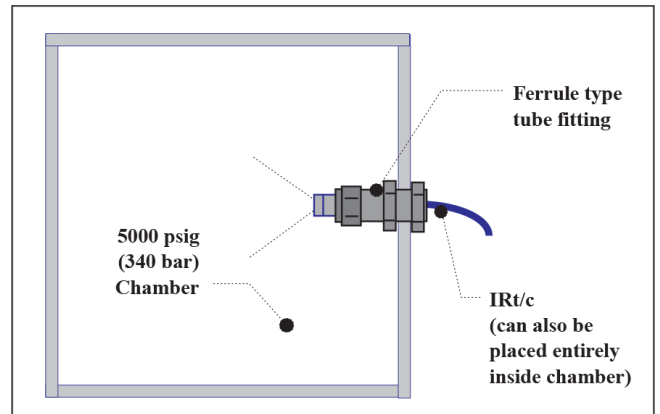

### Exergen Corporation office:

USA  
400 Pleasant Street  
Watertown, MA 02472  
Tel: +1 617 923 9900 press 4 for industrial  
Fax: +1 617 923 9911

### Exergen Industrial International/OEM Sales office:

Clever IR  
The Netherlands  
Pastoor Clercxstraat 26  
5465 RH Veghel  
Tel: +31 (0)413 376 599

[industrial@exergen.com](mailto:industrial@exergen.com)  
[www.exergen.com](http://www.exergen.com)

TN-077-1-EN