

## EASY UPGRADE OF EXISTING TEMPERATURE CONTROL SYSTEMS WITH IRt/c AND t/c.XMTR


- Replace conventional infrared sensing systems for superior accuracy, reliability, and low cost.
- Replace contact temperature sensors for noncontact measurement of actual product temperature instead of oven temperature.
- Retrofit using existing PLC analog inputs (4-20 mA, 0-5 V, 0-10 V).

The t/c.XMTR is specifically designed to make replacement or retrofit simple and inexpensive:

- In-line t/c.XMTR design is only slightly larger than the cable and requires no mechanical support.
- Precalibrated for thermocouple type and temperature range eliminates all adjustments, requirements for simulators, etc.

*\*For OEM's, IRt/c's and t/c.XMTR can be factory supplied wired together.*

- Hermetically sealed stainless steel construction is suitable for the harshest service without any additional packaging.
- Use any existing wiring, including thermocouple, RTD, etc.

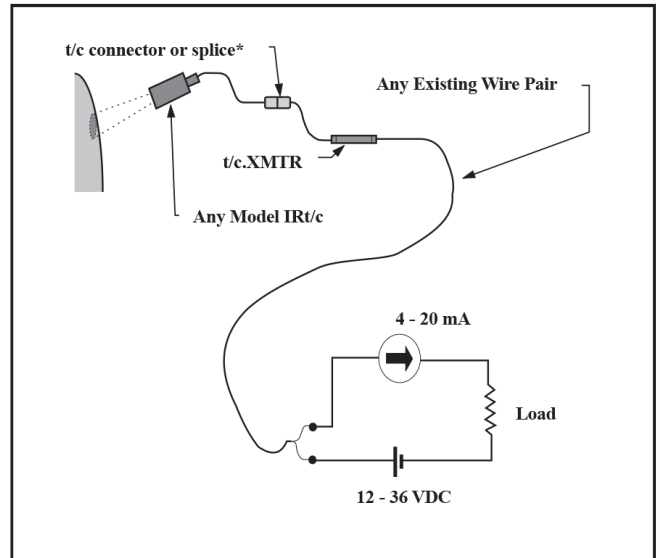

The t/c.XMTR is specifically designed to interface to any model IRt/c (or any conventional thermocouple) by a simple thermocouple connector or splice. The 2-wire current loop can be used in any conventional current loop, 0-5V, or 0-10V circuit that is scaled for the temperature range of interest.

Exergen Corporation office:

USA  
400 Pleasant Street  
Watertown, MA 02472  
Tel: +1 617 923 9900 press 4 for industrial  
Fax: +1 617 923 9911

Exergen Industrial International/OEM Sales office:

Clever IR  
The Netherlands  
Pastoor Clercxstraat 26  
5465 RH Veghel  
Tel: +31 (0)413 376 599

industrial@exergen.com  
www.exergen.com

TN-094-1-EN